


Chevy Corvette Z-06


Installation Instructions

Front Mask


Package Contents



Washer (Qty. 10)




Snap Head Screw (Qty. 10)

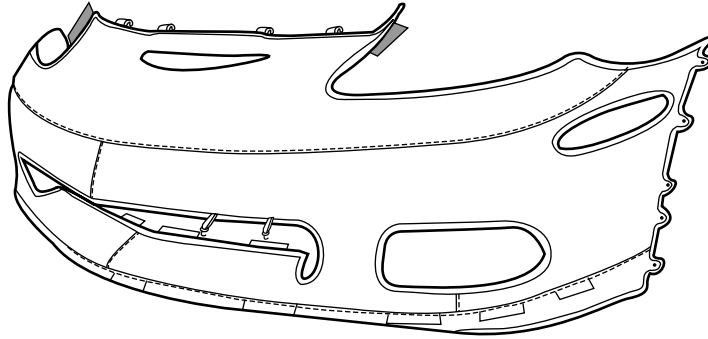

Front End Cover (Qty. 1)

Tools Required

Stubby Phillips
Screwdriver

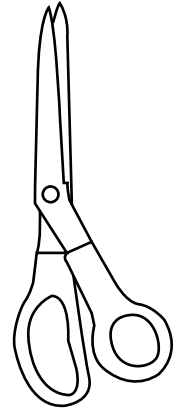


Scissors

0 Before Installation

- A. Area to be covered by mask must be clean. It is recommended that you wash and wax vehicle prior to installation.
- B. Both vehicle and mask must be completely dry prior to installation. If moisture under mask is allowed to dry on vehicle, paint may cloud.
- C. Any repainted surfaces in contact with mask must be allowed to cure completely. Consult paint manufacturer or repair facility if you are not sure.
- D. Detailers should provide all customers with a copy of these installation instructions for future reference.


1 Remove wheel well fasteners

- A. Using stubby phillips screwdriver, remove plastic fasteners along front edge of both front wheel wells that correspond to snaps on mask body.

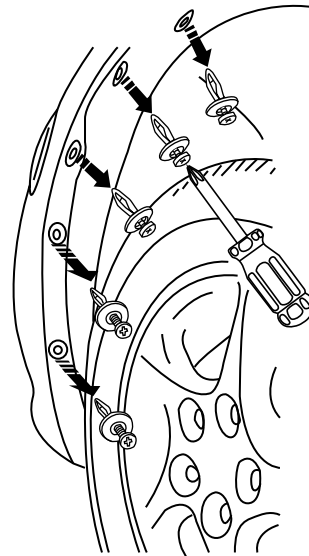

2 Install Wheel Well hardware

- A. Release liner to its original position. Using a stubby phillips screwdriver, install Snap Head Screw (G) with washer (F) in holes located in each wheel well.

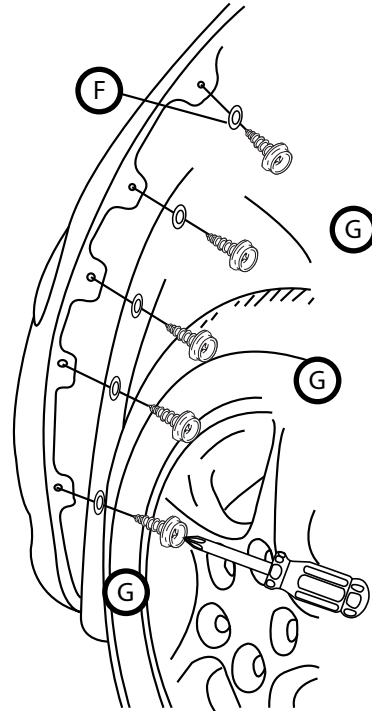


3 Install Wheel Well attachments

- A. Press snaps (K) onto snap head screws (G) in both front wheel wells.




Please start from the top and work your way down when attaching the snaps. (From 1 to 4)

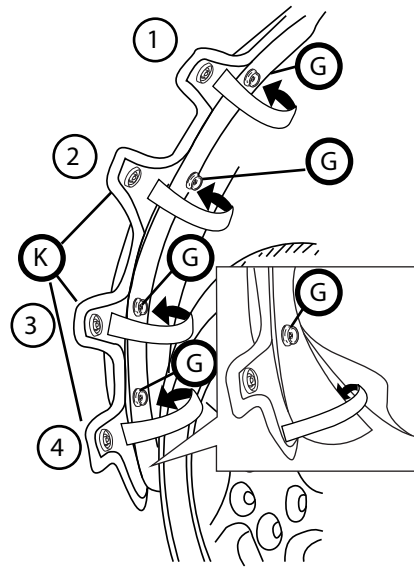


4 Install upper attachments

- A. On both sides of vehicle, insert outer pads (L) in slot between headlights and bumper.

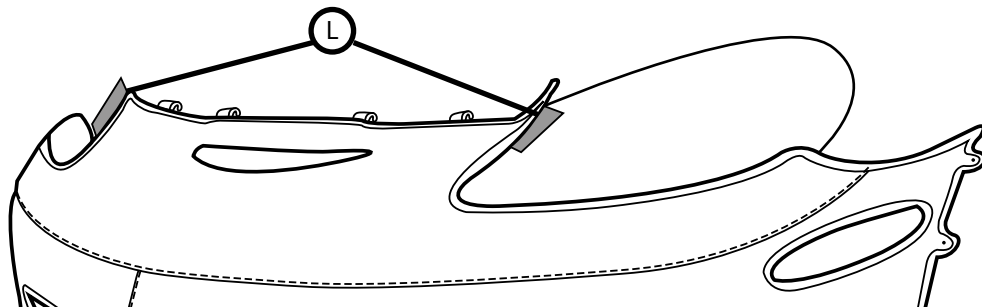


5


Install vent attachments

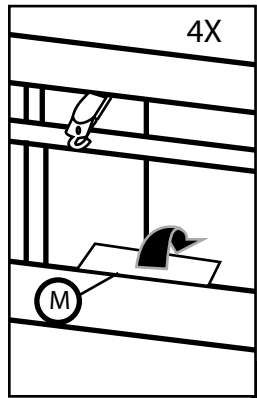

A. Below license plate bracket, insert pads (M) in the gap between vent grill and front fascia.

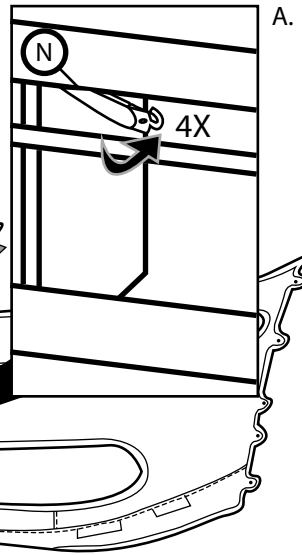




A. Below license plate bracket, attach elastics with 90 degree hooks (N) to top inside edge of vent grill tines.

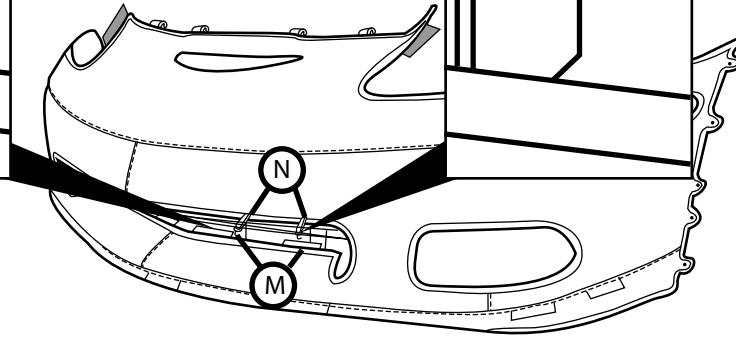

6

Connect J-Clips / Install bottom hooks

A. Insert clips (O) in between grill and front fascia. B. Insert pads (P) in the gap between front fascia and lower spoiler.

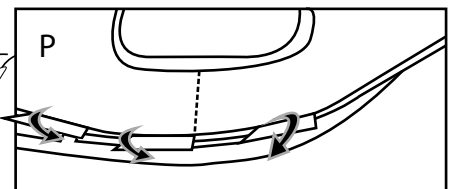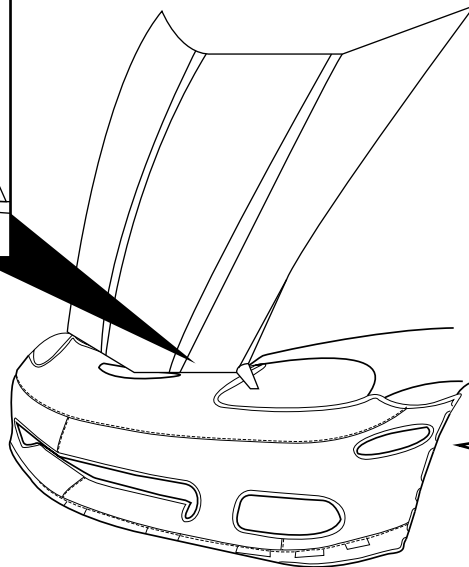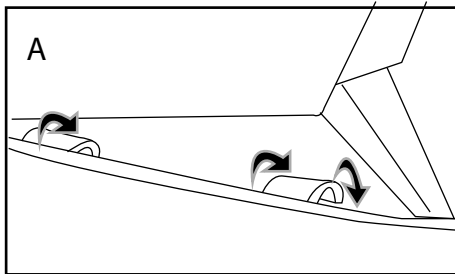

7

Care and Cleaning

- A. Always remove mask before washing vehicle.
- B. Hand clean mask using mild soap, rinse thoroughly with clean water and line dry completely. Do no machine dry!
- C. Use Mazda Vinyl /Leather Protectant (or equivalent) to preserve color and finish.
- D. If mask is left on vehicle in rain, dirt can potentially be washed under the mask and could scratch the vehicle. It is recommended that the mask be removed and cleaned along with vehicle as instructed if left on during rain, sleet or snow.
- E. **WARNING:** Running up on curb will damage this product. Manufacturer will not be responsible for damage to product due to accident or misuse.

Place in vehicle glove compartment.